Shimano,"XT"Rear Brake Caliper *Note :"The floating Disc Brake system utilizes an 8" rotor without adapter"

This diagram is for I.S. Mount 2002 Fly Only
This Mount is no longer available

441mm(17.35") Shock mount has middle hole location

Rear view has a little gap
Brake Pad outside line
8inch Roter outside line

Rod end

1:If touch Caliper is contacting the roter,the rod must be lengthened
2:When changing shock mount location,brake rod length must be adjusted

* Brake line :
Must have loop
for movement

Floating Brake arm
for Shimano disc caliper

Shimano International Standard
Rear disc caliper

Non-weighted Floating arm location

Rear view has No gap
Brake Pad outside line
8inch Roter outside line

*NOTE:When using four-piston calipers,the brake pads will make full contact during normal riding or with full weight on the bike.
For clearance reasons, this compromise is necessary.

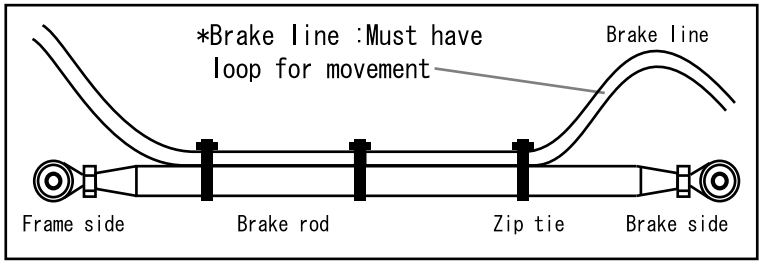

Fully-compressed Floating arm location

FOES FABRICATIONS INC. 62N.Sierra Madre Blvd.Pasadena CA 91107 USA www.foesracing.com Tel:626 683 8368 (Tech Support ext.104) Fax:626 683 8622